

ELECTRIC **VANS & TRUCKS**

EV-100 & EV-150

Find out more at www.elintamotors.com





EFFICIENT

The Elinta Motors direct drive motor does not use any gearbox increasing efficiency and range.



INTELLIGENT

Intelligent Electric Vehicle is always connected. Performance data and smart monitoring can be viewed via Android app or online fleet management system.

DURABLE

Developed and manufactured in house, we use only the best quality, powerful components and battery systems. Designed for heavy-duty applications and built to last.

JSC "Elinta Motors" Terminalo g. 3, Biruliškių k., Kaunas, Lithuania +370 37 351 987 | info@elintamotors.com



PERFORMANCE

Model	Mode	Power	Torque	Top speed	Range
EV-100	EV	135 Hp	1150 Nm	90-100 km/h	200-250 km
EV–150	EV	200 Hp	1250 Nm	80-100 km/h	200-290 km

POWERTRAIN

Small yet powerful, Elinta Motors induction motors are only 310mm in diameter – providing up to 1250 Nm of torque. Li-ion technology battery systems are perfect for commercial applications while the Integrated BMS and climate control ensures 2500+ charge cycles.

	EV-100	EV-150
Motor Type	LCM.31.110 ASM	LCM.31.110 ASM
Drive Type	Direct Shaft	Direct Shaft
Efficiency	93.5 %	93.5 %
Cooling	Liquid	Liquid
System Weight	170 kg	170 kg
Battery Weight	540 kg	790 kg
Capacity/Voltage	74 kWh/ 400 V	115 kWh / 400 V
Charger Power	6.6 kW - 12.8 kW	12.8 kW - 19.8 kW
Fast charge (CCS) power	75 kW	100 kW
Charging time	4 hours	6 hours
Fast charging time (CCS)	1 hour	1.2 hours


INTERFACE

The 7" Touchscreen is unified seamlessly into original front panel. Drivers can see energy efficiency, driving modes, climate system.



CLIMATE


Automatic climate control is integrated with a 7 kW electric heater and 5 kW efficient high voltage powered A/C unit.

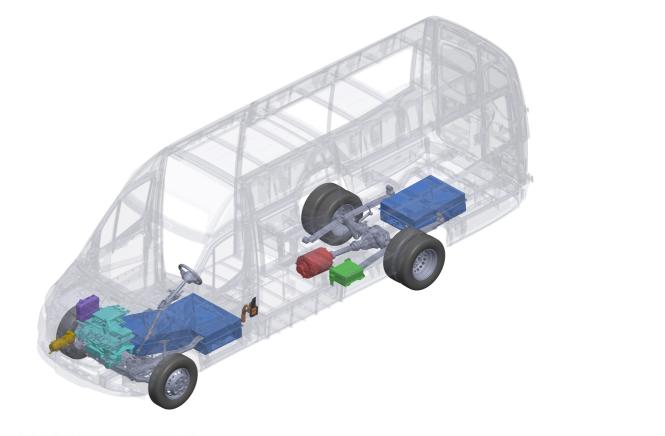

EV-100



Iveco Daily 35S12V

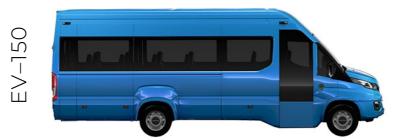

Iveco Daily 56C15

Iveco Daily 35S12V

3500 kg - 3800kg

1200x1800x3540

900 kg - 1200 kg

4100 mm

4.222

Single

12 m3

5960 mm

Model Wheelbase G.V.W. Rear Axle Wheels Length Cargo Size Cargo Load Cargo Capacity

Iveco Daily 35 4100 mm 3500 kg - 380 4.222 Single 6523 mm 2100x1800x44 800 kg - 1300



Iveco Daily 35S12



Iveco Daily 70C15

55512	Iveco Daily 56C15
	4750 mm
00kg	5000 kg - 5600kg
	5.13
	Dual
	7629 mm
495	1740x2100x5125
) kg	2200 kg - 2600 kg
	20 m3

Iveco Daily 70C15 4750 mm 7000 kg 5.13 Dual 6953 mm 2100x1800x4495 3200 kg - 4000 kg